


P/N 9509-002

Our inflatable shelter system was developed to meet the requirements of emergency responders. The versatility of Tulmar's Inflatable Shelters now makes it suitable for a variety of industries and uses, from mobile command centers for emergency responders, to pop-up waiting rooms and first air tent.



Color	Grey (Structure) / Bright Blue (Canopy / Walls) / Brown (Floor)
Appearance	Semi-Translucent / White Ceiling Tall inflatable tent with bright blue color and optional logo swatch to each side. It has a peak at a gentle angle, and an elbow to each side. Each side of the Canopy includes a small square port for ventilation, heating or other system. Inside is a grey inflatable structure lined with hook & loop fasters.
Weight	370lbs (168kg)
Dimensions	15'W x 20'L x 9.7'H (4.6m x 6.1m x 3m)
Packed Dimensions (Box)	28" x 28" x 60" (71cm x 71cm x 152cm)
Operational Temperature	-30°C to 60°C
Operational Wind levels	Up to 60kmph (37mph)
Optimal Air Pressure	3 P.S.I.
Weight load capacity / (snow load) - Ceiling	2-4.1lbs/ft ² snow load on shelter roof (10-20kg/m ²)
Inflation time (cylinder)	5 – 10 minutes
Inflation time (Air inflation)	10 – 20 minutes
Material	Structure: Pester PVC Coated: Fire Resistant; anti-fungus and anti-mildew / Canopy & Walls (Blue): PVC Coated: UV Resistant; anti-fungus, anti-mildew, antibacterial and antimicrobial treated / Canopy (Translucent): Rot, Mildew & UV Resistant Fabric / Floor: Mildew & Fungus Resistant Fabric
Cleaning	Gentle / Mild soap or detergent / Dry fully before storage
Replaceable Component	Canopy, Floor, End Walls, Valise, Repair Kit, Anchor Pegs (3838)
Accessories	SCBA Hose Assembly, SCUBA Hose Assembly, Top-Up valve, Pressure relief valve, Red weight bag, Grey weight bag, Red weight bag with cement, Grey weight bag with cement, Partition Walls
Markings	Serial Number (Valise / Structure, near ports) / "3 P.S.I." (Structure, near ports) / Custom Logo Side Canopy (on demand)

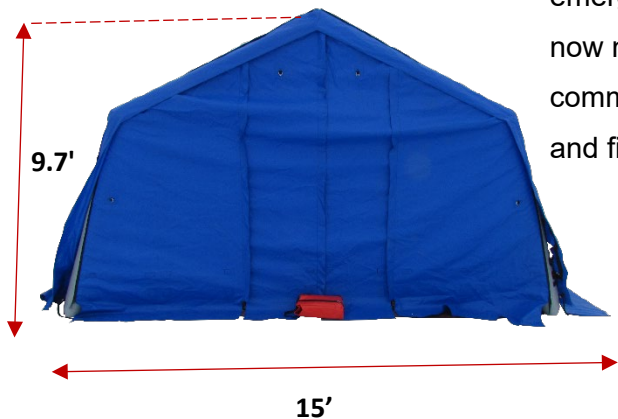

P/N 9508-001

Our inflatable shelter system was developed to meet the requirements of emergency responders. The versatility of Tulmar's Inflatable Shelters now makes it suitable for a variety of industries and uses, from mobile command centers for emergency responders, to pop-up waiting rooms and first air tent.



Color	Grey (Structure) / Bright Blue (Canopy / Walls) / Brown (Floor) Semi-Translucent / White Ceiling
Appearance	Tall inflatable tent with bright blue color and optional logo swatch to each side. It has a peak at a gentle angle, and an elbow to each side. Each side of the Canopy includes a small square port for ventilation, heating or other system. Inside is a grey inflatable structure lined with hook & loop fasters.
Weight	225lbs (102kg)
Dimensions	12'W x 15'L x 8.1'H (3.7m x 4.6m x 2.5m)
Packed Dimensions (Box)	24" x 24" x 52" (61cm x 61cm x 135cm)
Operational Temperature	-30°C to +60°C
Operational Wind levels	<u>Up to</u> 60kmph (37mph)
Optimal Air Pressure	3 P.S.I.
Weight load capacity / (snow load) - Ceiling	2-4.1lbs/ft ² snow load on shelter roof (10-20kg/m ²)
Inflation time (cylinder)	5 – 10 minutes
Inflation time (Air inflation)	10 – 20 minutes
Material	Structure: Pester PVC Coated: Fire Resistant; anti-fungus and anti-mildew / Canopy & Walls (Blue): PVC Coated: UV Resistant; anti-fungus, anti-mildew, antibacterial and antimicrobial treated / Canopy (Translucent): Rot, Mildew & UV Resistant Fabric / Floor: Mildew & Fungus Resistant Fabric
Cleaning	Gentle / Mild soap or detergent / Dry fully before storage
Replaceable Component	Canopy, Floor, End Walls, Valise, Repair Kit, Anchor Pegs (3838)
Accessories	SCBA Hose Assembly, SCUBA Hose Assembly, Top-Up valve, Pressure relief valve, Red weight bag, Grey weight bag, Red weight bag with cement, Grey weight bag with cement, Partition Walls
Markings	Serial Number (Valise / Structure, near ports) / "3 P.S.I." (Structure, near ports) / Custom Logo Side Canopy (on demand)

